

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

**(19) World Intellectual Property Organization
International Bureau**



A standard linear barcode is positioned horizontally across the page, consisting of vertical black bars of varying widths on a white background.

**(43) International Publication Date
18 May 2006 (18.05.2006)**

PCT

(10) International Publication Number
WO 2006/052081 A1

(51) International Patent Classification:
D06F 58/06 (2006.01) *F16C 11/06* (2006.01)
D06F 37/20 (2006.01)

(74) Agents: BAHNG, Hae Cheol et al.; KBK & ASSOCIATES, 15th Floor Yo Sam Building, 648-23, Yeoksam-dong, Kangnam-gu, Seoul 135-080 (KR).

(21) International Application Number: PCT/KR2005/003786

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AI., AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, BE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 9 November 2005 (09.11.2005)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: Korean


Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: DBYER

(75) Inventor/Applicant (for US only): YOON, Myoung Kee [KR/KR]; Sinsegae Apt. 9-1305, Suscong 1ga-dong Suseong-gu, Daegu 706-749 (KR).

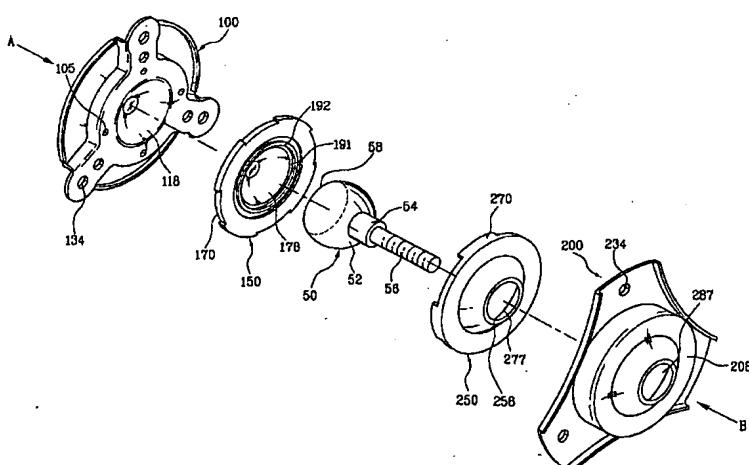

(57) Abstract: A drying machine in which a rotary drum (30) is stably supported is disclosed. The drying machine includes a cabinet (1); a drum (30) rotatably installed in the cabinet (1) for containing laundry to be dried; a first housing (100) connected to the drum (30); a second housing (200) connected to the first housing (100); first (150) and second (250) bearings respectively provided in the first (100) and second (200) housings; and a shaft (50) supported by the first (150) and second (250) bearings, and rotatably connected to the drum (30).